

CRYSTAL MINI LED MODULES



Features

- Powered by high output 2835 LED.
- Constant Voltage.
- Diamondback 180*140° optic lens.
- 40 pcs per string.
- CE, RoHS,UL,TUV, BIS, CB and LM-80 certified.

Application

- Apply to 3–8 cm depth signs at airports, metros, banks, buildings and shopping malls, etc.


Parameters

Items	Parameters		
Part Number	ZE01CA1	ZE02CA1	ZE03CA1
CCT (K)	6500K	6500K	6500K
Beaming Angle (°)	180*140°	180*140°	180*140°
CRI (Ra)	≥80	≥80	≥80
Luminous Flux (lm)	29	55	85
Voltage (V)	DC12	DC12	DC12
Power (W)	0.24	0.48	0.72
Driving Method	Constant Voltage	Constant Voltage	Constant Voltage
Dimension (mm)	14*9*8.8	26*9*9	38*9*9
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP66	IP66	IP66


Dimension

Unit: mm

ZE01CA1

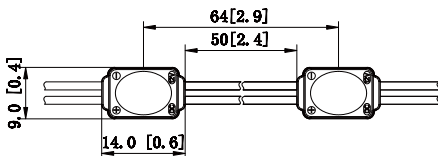

ZE02CA1

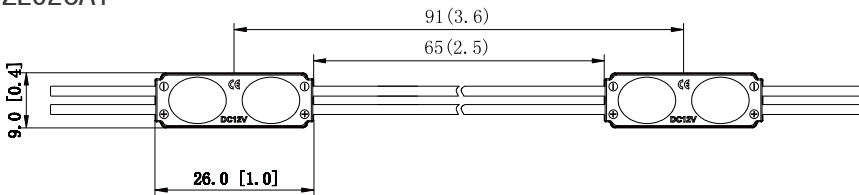

ZE03CA1

