


# BASIC MINI LED MODULES

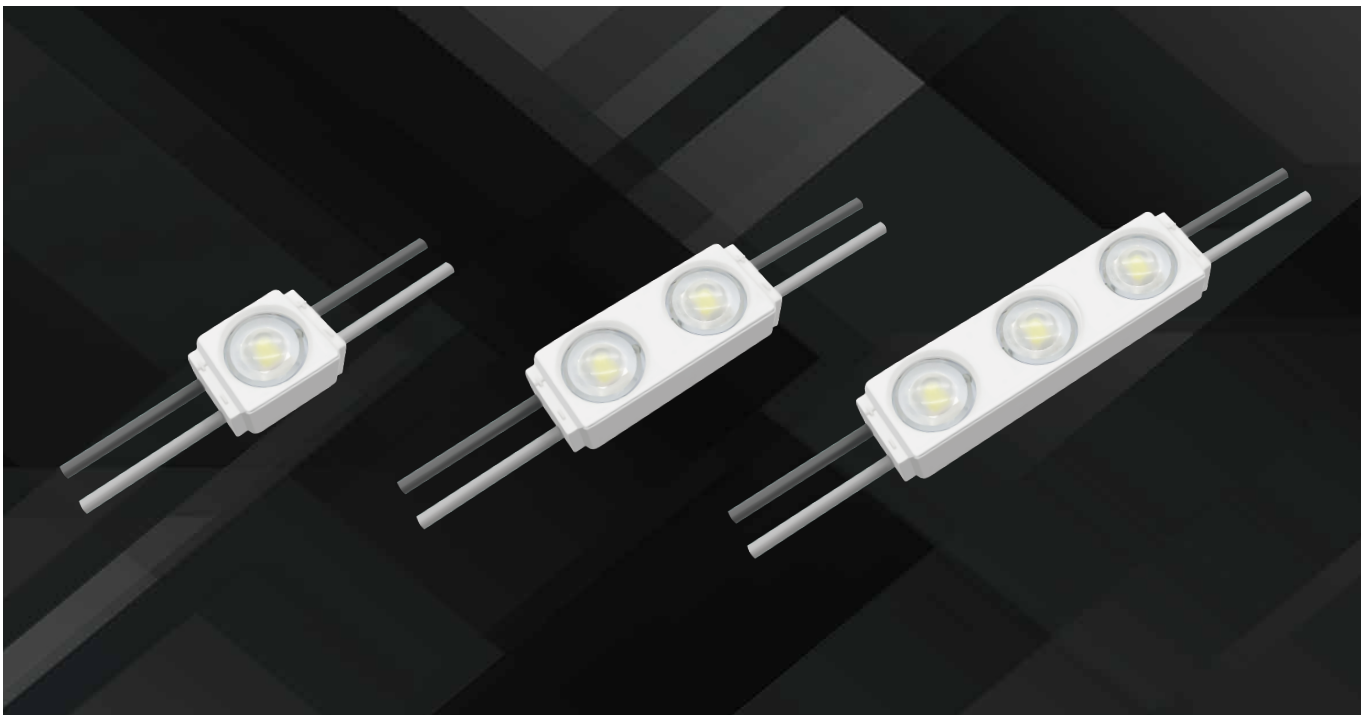

## Features

- Powered by high output 2835 LED.
- Constant Voltage.
- Clear 170° optic lens.
- 20 pcs per string.
- CE, RoHS,UL,TUV, BIS, CB and LM-80 certified.

## Application

- Apply to 2–6 cm depth signs at airports, metros, banks, buildings and shopping malls, etc.



## Parameters

Items	Parameters		
Part Number	ZE01QAT	ZE02QAT	ZE03QAT
CCT (K)	7000K	7000K	7000K
Beaming Angle (°)	170°	170°	170°
CRI (Ra)	≥70	≥70	≥70
Luminous Flux (lm)	30	60	90
Voltage (V)	DC12	DC12	DC12
Power (W)	0.24	0.48	0.72
Driving Method	Constant Voltage	Constant Voltage	Constant Voltage
Dimension (mm)	13*10.2*7	25*10.2*7	37*10.2*7
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP65	IP65	IP65



## Dimension

Unit: mm

ZE01QAT

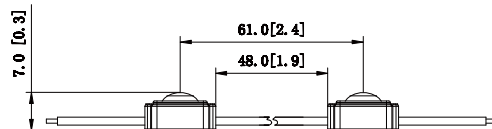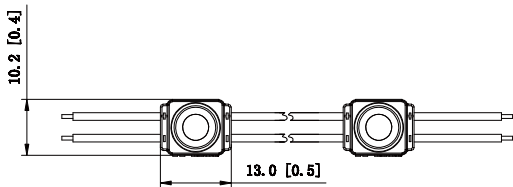

ZE02QAT

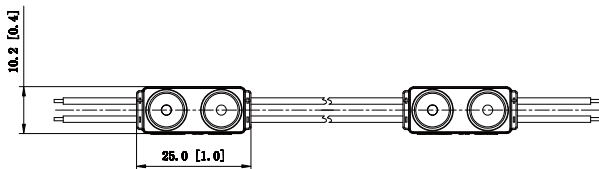

ZE03QAT

