


AC SIDELIT LED BARS

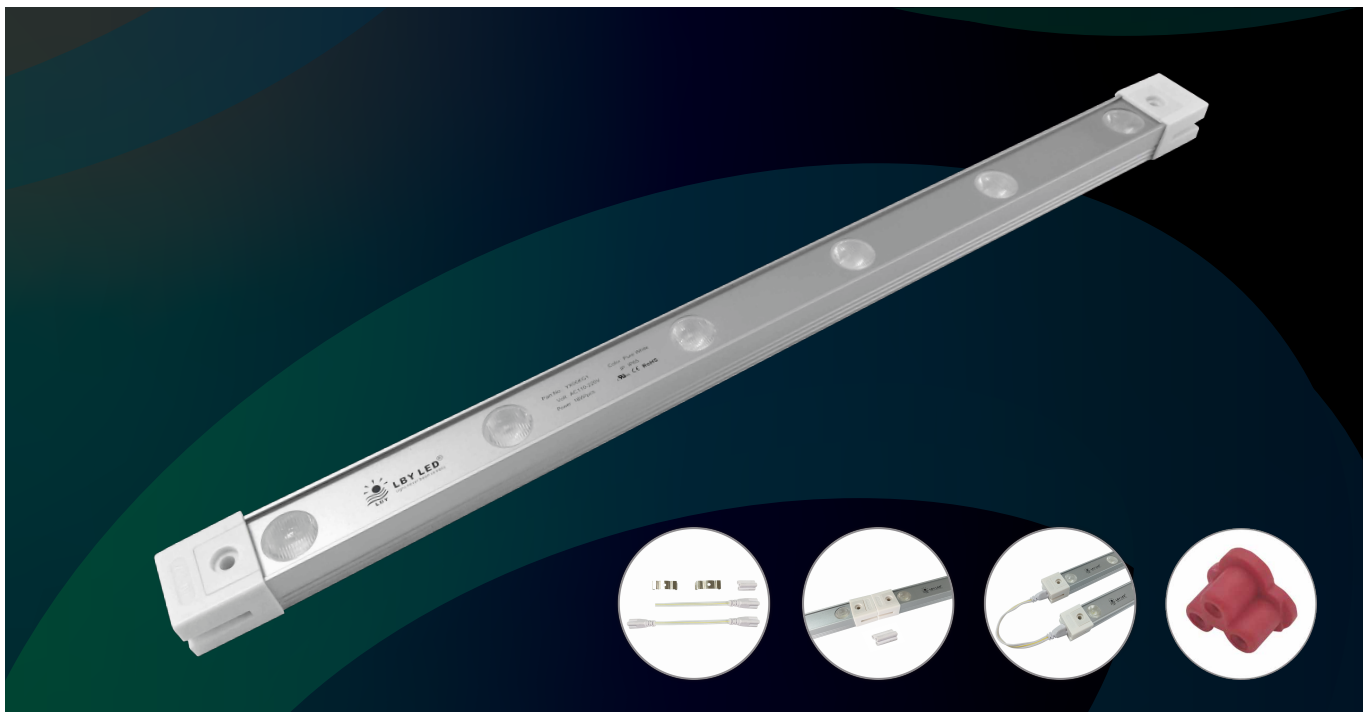

Features

- Powered by high output OSRAM LED.
- constant current.
- Classical 10x45 optic lens.
- 20 pcs per string.
- Fire resistance UL94-0.
- CE, RoHS, TUV, BIS, CB and LM-80 certified.

Application

- Light coverage: 1-3M
- Apply to 10-30 cm depth double-sided light box at airports, metros, banks, buildings and shopping malls, etc.

Parameters

Items	Parameters
Part Number	YX06KG2
CCT (K)	6500K
Beaming Angle (°)	10*45°
CRI (Ra)	≥75
Luminous Flux (lm)	1450
Voltage (V)	DC110-220V
Power (W)	18
Driving Method	Constant Current
Dimension (mm)	495*32.4*23.3
Working Tem. (°C)	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70
Protection Grade	IP60

Dimension

Unit: mm

