


BASIC LED MODULES

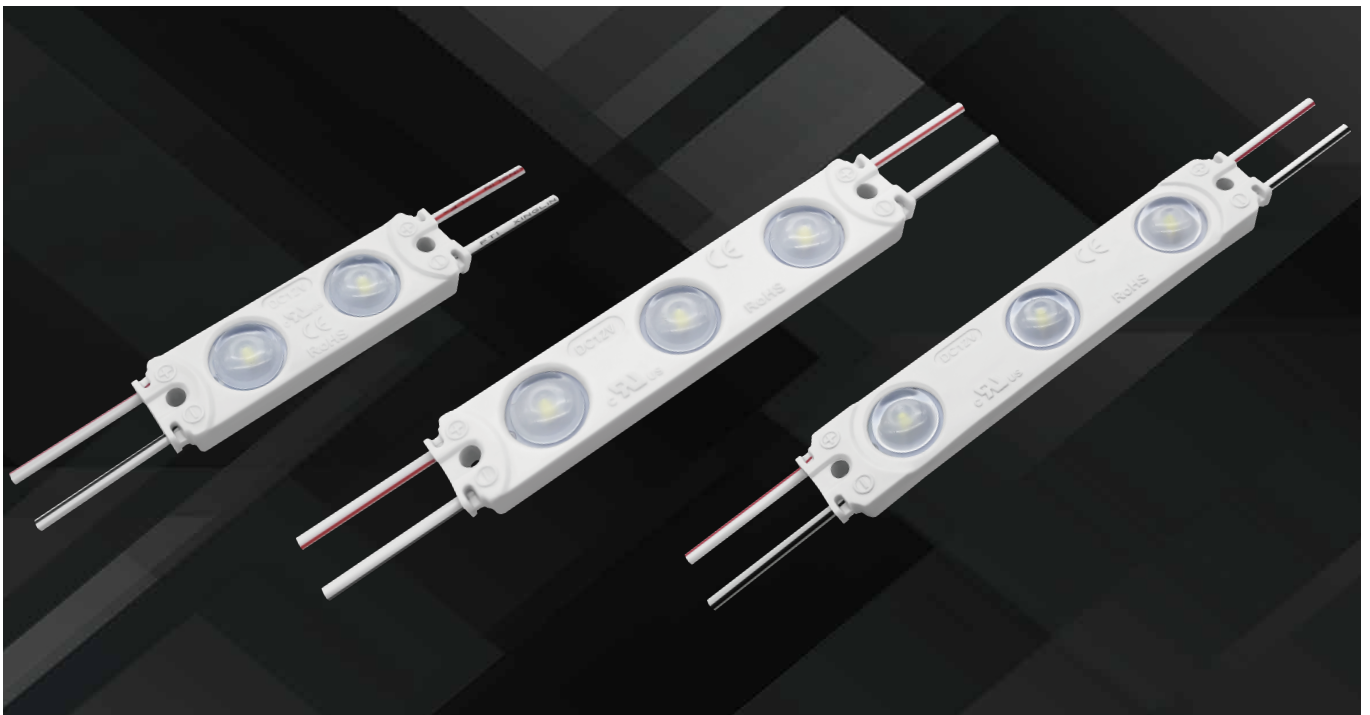

Features

- Powered by high output 2835 LED.
- Constant voltage.
- Clear 160° optic lens.
- 20 pcs per string.
- CE, RoHS,UL,TUV, BIS, CB and LM-80 certified.

Application

- Apply to 3–15 cm depth signs at airports, metros, banks, buildings and shopping malls, etc.


Parameters

Items	Parameters		
Part Number	ZE02QAC	ZE03QAC	ZE03QAD
CCT (K)	7000K	7000K	7000K
Beaming Angle (°)	160°	160°	160°
CRI (Ra)	≥75	≥75	≥75
Luminous Flux (lm)	70	100	145
Voltage (V)	DC12	DC12	DC12
Power (W)	0.72	1	1.5
Driving Method	Constant Voltage	Constant Voltage	Constant Voltage
Dimension (mm)	50.5*15*7.2	74.5*15*7.2	83*15*7.2
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP65	IP65	IP65


Dimension

Unit: mm

ZE02QAC

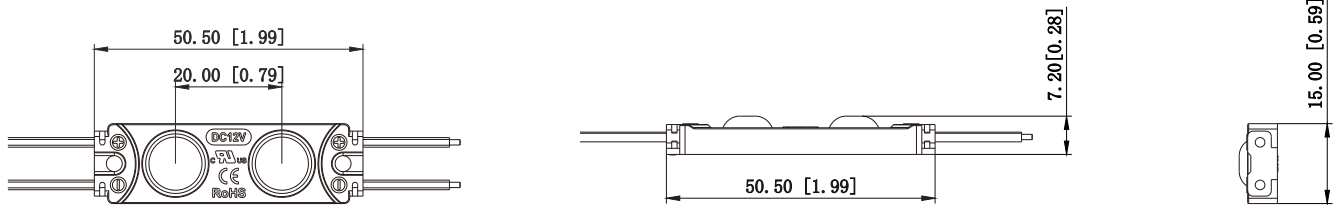

ZE03QAC

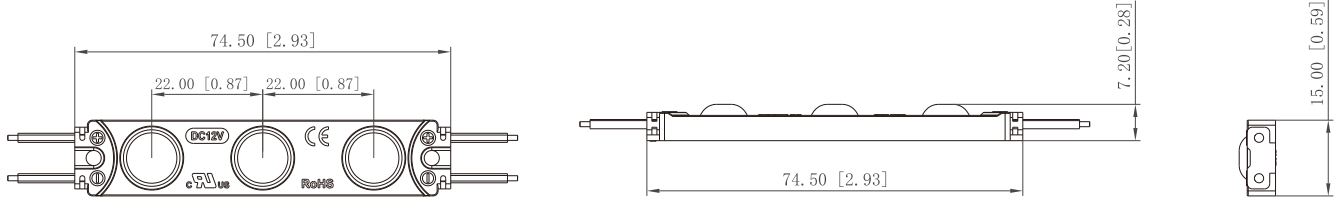

ZE03QAD

