

BASIC LED MODULES



Features

- Powered by high output 2835 LED.
- 99.99% gold thread, pure copper bracket coated with silver.
- Constant voltage.
- Clear 160° optic lens.
- SDCM ≤ 5 each BIN.
- 20 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

Application

- Apply to 6–15 cm depth signs at airports, metros, banks, buildings and shopping malls, etc.


Parameters

Items	Parameters		
Part Number	ZE02QAM	ZE03QAM	ZE04QAM
CCT (K)	7000K	7000K	7000K
Beaming Angle (°)	160°	160°	160°
CRI (Ra)	≥75	≥75	≥75
Luminous Flux (lm)	55	90	110
Voltage (V)	DC12	DC12	DC12
Power (W)	0.6	1	1.2
Driving Method	Constant Voltage	Constant Voltage	Constant Voltage
Dimension (mm)	50*14*6.4	74*14*6.4	40*38*6.4
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP65	IP65	IP65


Dimension

ZE02QAM

Unit: mm

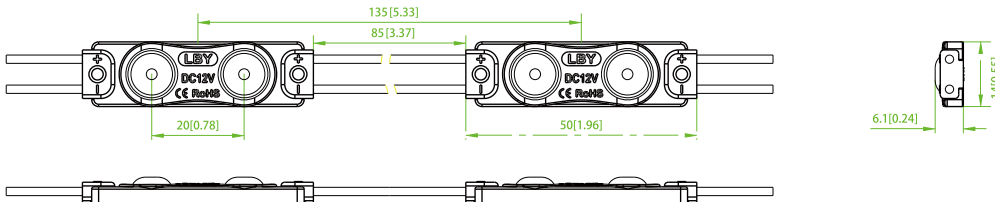

ZE03QAM

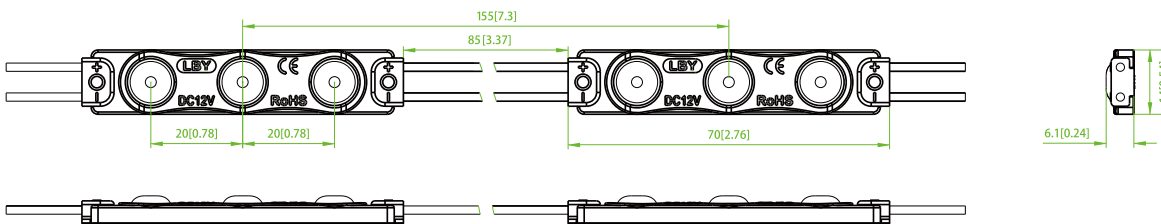

ZE04QAM

