

DIAMONDBACK LED MODULES



Features

- Powered by high output 2835 LED.
- Constant current.
- Clear 170° optic lens.
- 50 pcs per string.
- CE, RoHS,UL,TUV, BIS, CB and LM-80 certified.

Application

- Apply to 6–15 cm depth illuminate letter or light box at airports, metros, banks, buildings and shopping malls, etc.


Parameters

Items	Parameters	
Part Number	ZE02QBE / ZE02QD1	ZE03QBE / ZE03QD1
CCT (K)	7000K / Red / Green / Blue	7000K / Red / Green / Blue
Beaming Angle (°)	170°	170°
CRI (Ra)	≥80	≥80
Luminous Flux (lm)	90	140
Voltage (V)	DC12/24	DC12/24
Power (W)	0.8	1.2
Driving Method	Constant Current	Constant Current
Dimension (mm)	66*18*7.3	88*18*7.3
Working Tem. (°C)	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70
Protection Grade	IP65	IP65

Dimension

Unit: mm

ZE02QBE / ZE02QD1

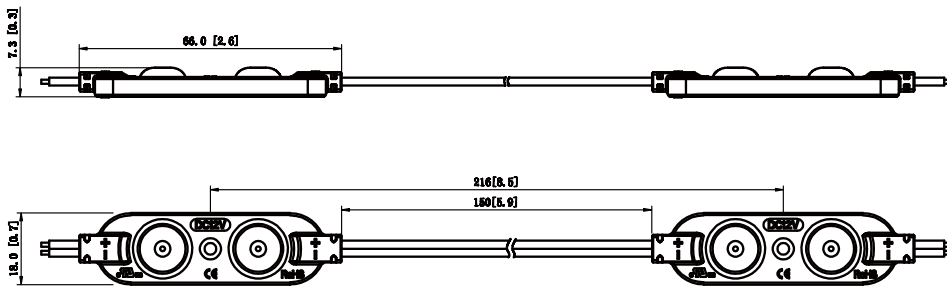

ZE03QBE / ZE03QD1

