


# SIDELIT LED BARS

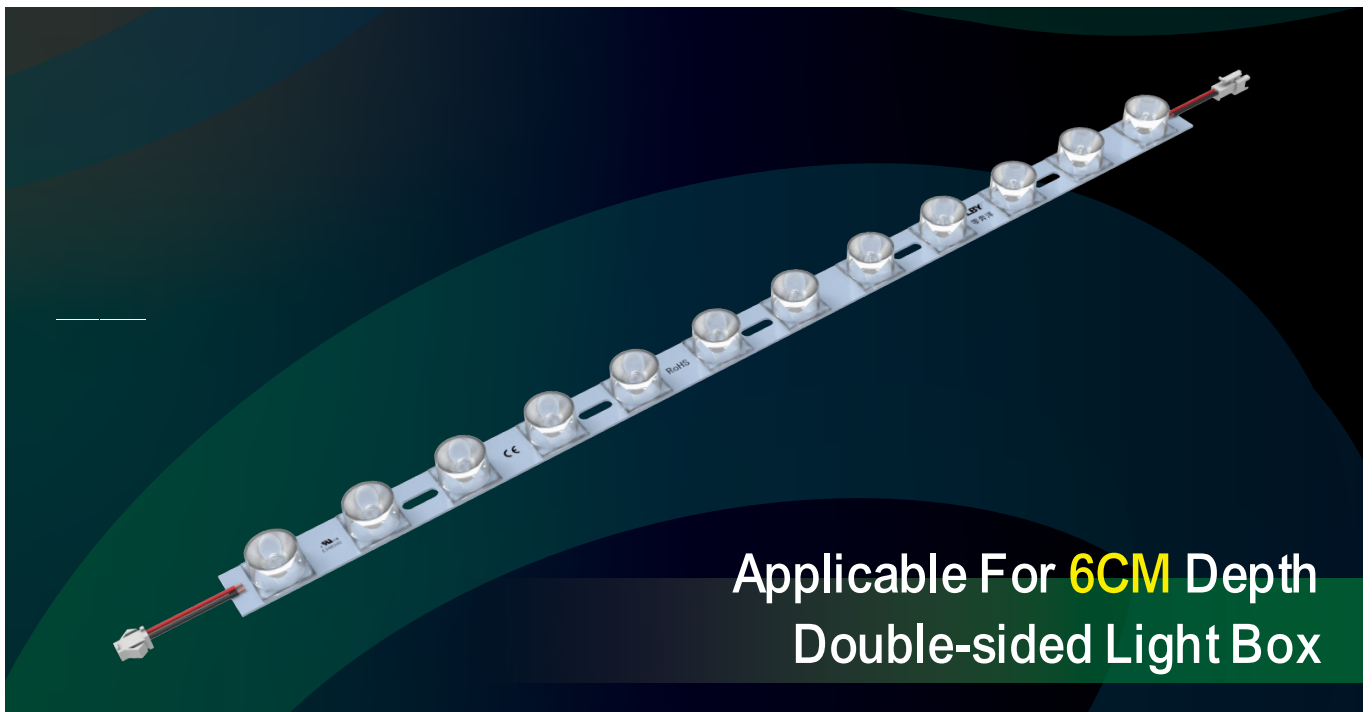

## Features

- Powered by high output 3030 LED.
- Constant current.
- Classical 15x45° optic lens.
- 6/3 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

## Application

- Light coverage: 0.5–1.5M
- Apply to 6–12 cm depth double-sided light box at airports, metros, banks, buildings and shopping malls, etc.

## Parameters

Items	Parameters	
Part Number	YF12LD3	YF24LD3
CCT (K)	6500	6500
Beaming Angle (°)	15*45°	15*45°
CRI (Ra)	≥70	≥70
Luminous Flux (lm)	810	1650
Voltage (V)	DC24	DC24
Power (W)	9	18
Driving Method	Constant Current	Constant Current
Dimension (mm)	480*23*12	960*23*12
Working Tem. (°C)	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70
Protection Grade	IP20	IP20

## Dimension

Unit: mm

