


SIDEDLIT LED BARS

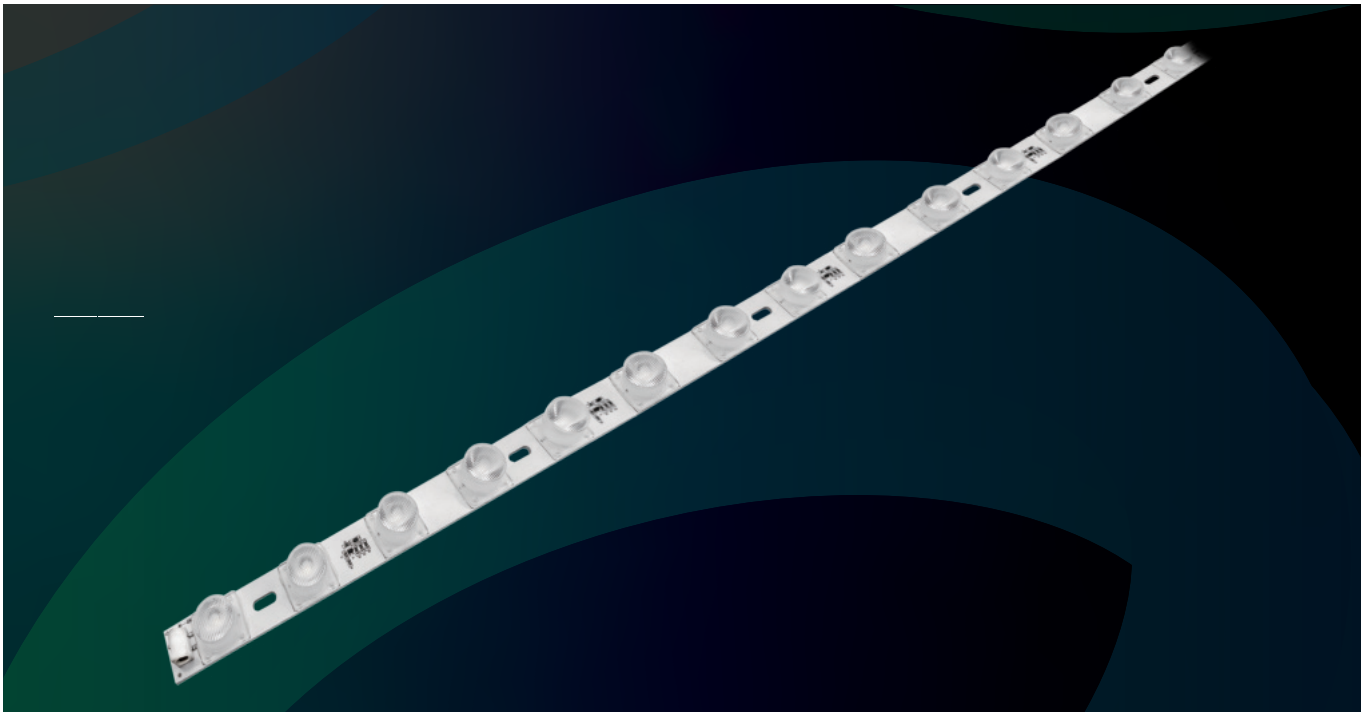

Features

- Powered by high output OSRAM LED.
- Constant current.
- Elliptical 15x45° optic lens.
- 4 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

Application

- Light coverage: 0.5–1.5M
- Apply to 8–12 cm depth double-sided light box at airports, metros, banks, buildings and shopping malls, etc.

Parameters

Items	Parameters
Part Number	YF18LD1
CCT (K)	6500K
Beaming Angle (°)	15*45°
CRI (Ra)	≥80
Luminous Flux (lm)	1800
Voltage (V)	DC24
Power (W)	18
Driving Method	Constant Current
Dimension (mm)	955*25*16.5
Working Tem. (°C)	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70
Protection Grade	IP33

Dimension

Unit: mm

