


SIDELIT LED BARS

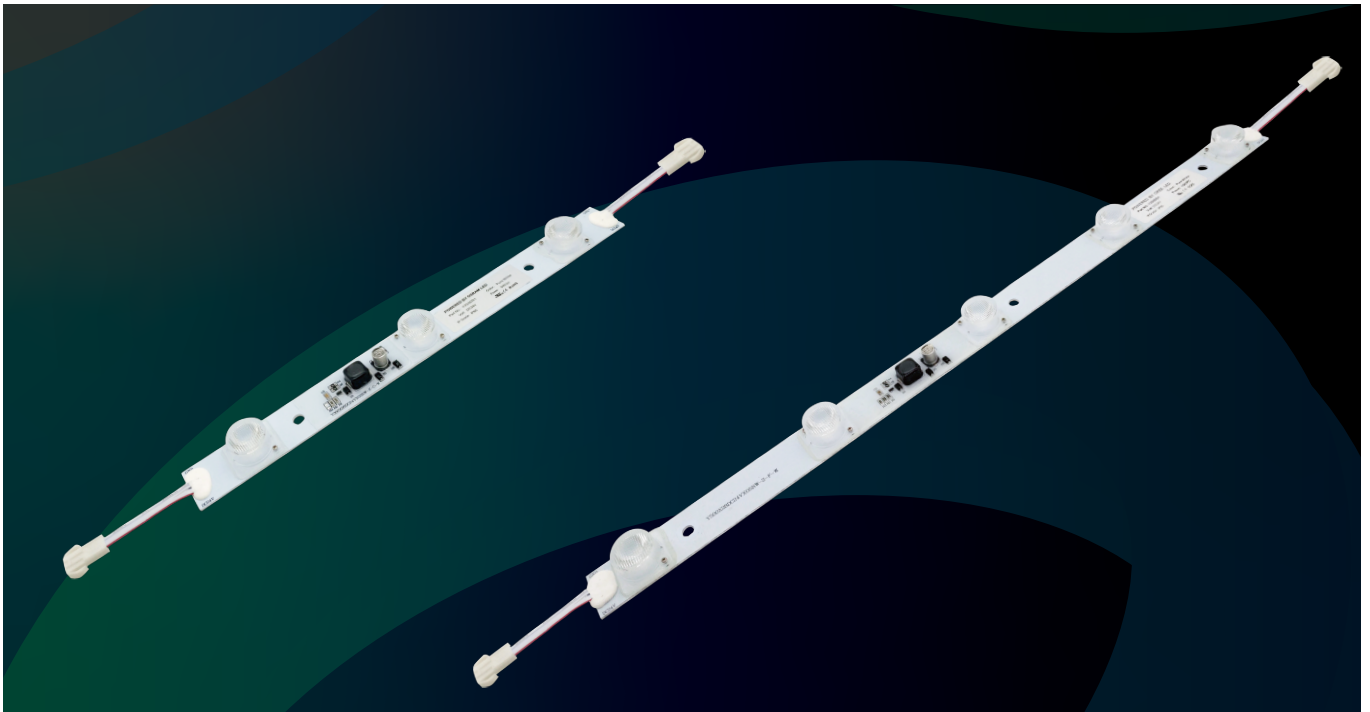

Features

- Powered by high output OSRAM LED.
- Constant current.
- Elliptical 15x45° optic lens.
- 20/10 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

Application

- Light coverage: 1–3M
- Apply to 10–30 cm depth double-sided light box or 10–20cm depth single-sided light box at airports, metros, banks, buildings and shopping malls, etc.

Parameters

Items	Parameters	
Part Number	YX03DD1	YX05DD1
CCT (K)	6500	6500
Beaming Angle (°)	15*45°	15*45°
CRI (Ra)	≥75	≥75
Luminous Flux (lm)	850	1500
Voltage (V)	DC24	DC24
Power (W)	9	15
Driving Method	Constant Current	Constant Current
Dimension (mm)	295*27.5*15.6	495*27.5*15.6
Working Tem. (°C)	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70
Protection Grade	IP65	IP65

Dimension

Unit: mm

