


SIDELIT LED BARS

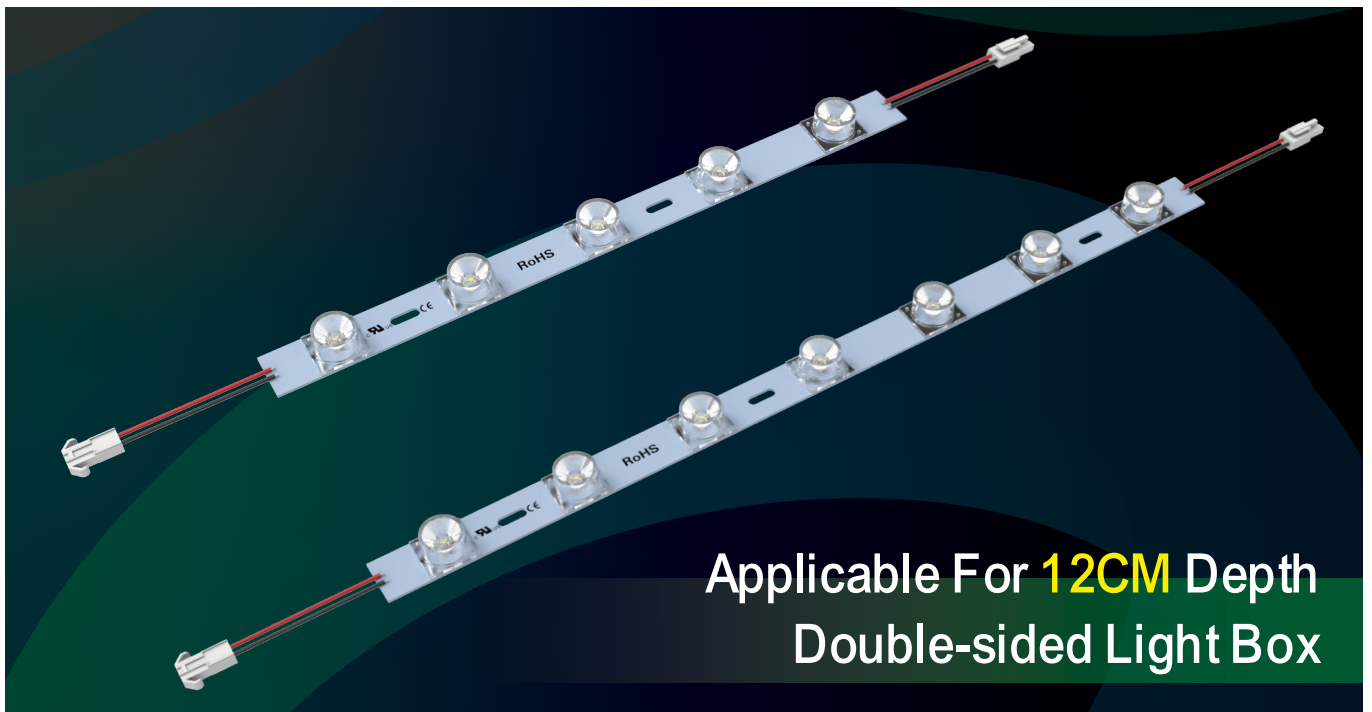

Features

- Powered by high output 3535 LED.
- Constant Current.
- Classical 15x45° optic lens.
- 12/8 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

Application

- Light coverage: 0.5–2M
- Apply to 12–20 cm depth double-sided light box at airports, metros, banks, buildings and shopping malls, etc.

Parameters

Items	Parameters	
Part Number	YX05LD1	YX07LD1
CCT (K)	6500	6500
Beaming Angle (°)	15*45°	15*45°
CRI (Ra)	≥70	≥70
Luminous Flux (lm)	1050	1450
Voltage (V)	DC24	DC24
Power (W)	10	14.5
Driving Method	Constant Current	Constant Current
Dimension (mm)	350*25*15	490*25*15
Working Tem. (°C)	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70
Protection Grade	IP20	IP20

Dimension

Unit: mm

