


SIDELIT LED BARS

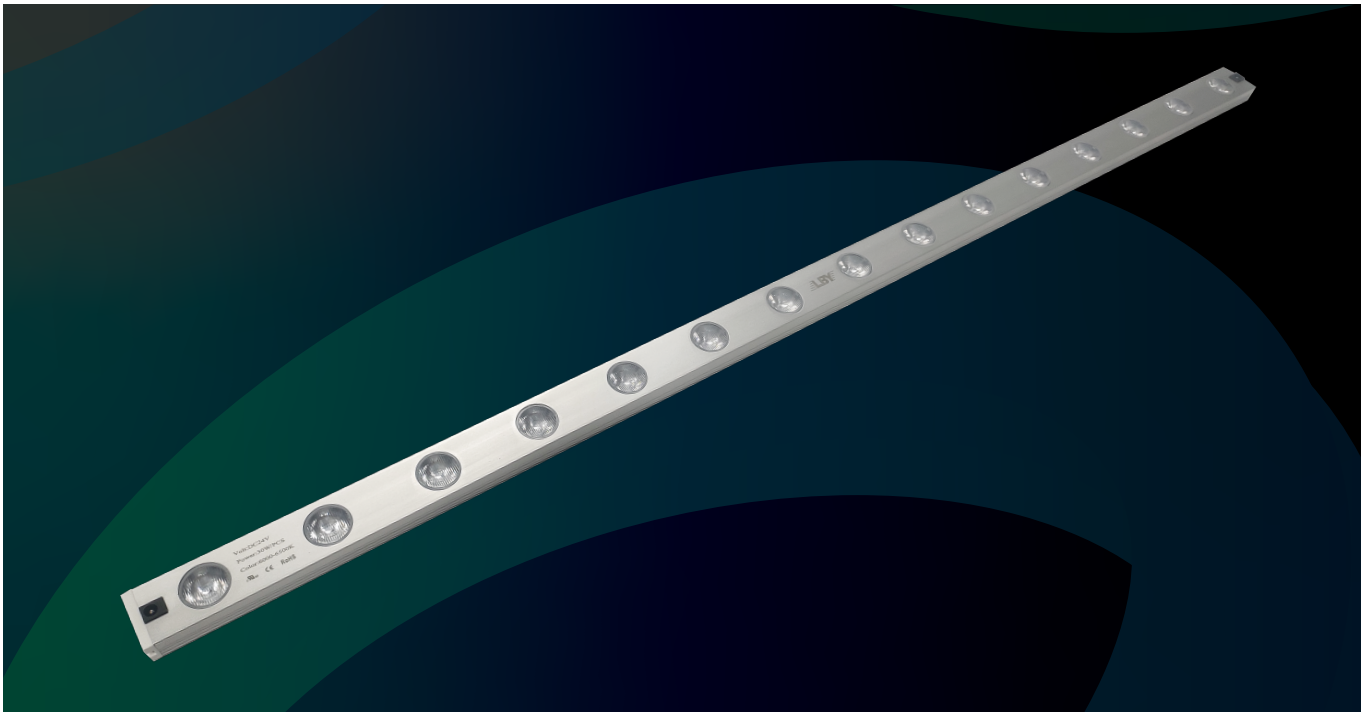

Features

- Powered by high output 3535 CREE LED.
- Constant current.
- Elliptical 8x15° optic lens.
- 3 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

Application

- Light coverage: 1-2M
- Apply to 10-18 cm depth double-sided light box at airports, metros, banks, buildings and shopping malls, etc.

Parameters

Items	Parameters
Part Number	YX15KD1
CCT (K)	6500K
Beaming Angle (°)	8*15°
CRI (Ra)	≥75
Luminous Flux (lm)	2600
Voltage (V)	DC24
Power (W)	30
Driving Method	Constant Current
Dimension (mm)	945*34*16
Working Tem. (°C)	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70
Protection Grade	IP20

Dimension

Unit: mm

