


Powered by OSRAM LED MODULES

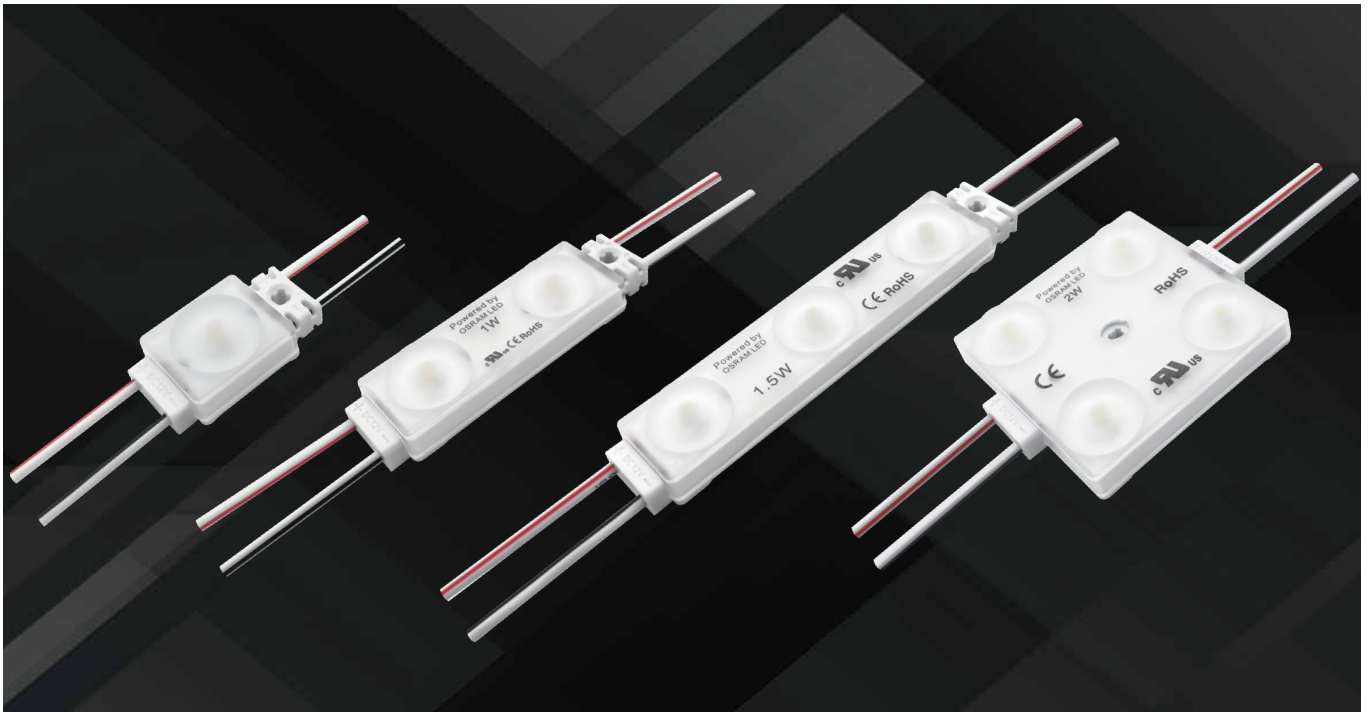

Features

- Powered by high output OSRAM LED.
- Constant current.
- Integrated transparent 170° optic lens.
- 50 pcs per string.
- CE, RoHS,UL,TUV, BIS, CB and LM-80 certified.

Application

- Apply to 3–15 cm depth illuminate letter or light box at airports, metros, banks, buildings and shopping malls, etc.


Parameters

Items	Parameters			
Part Number	ZR01QB1	ZR02QB1	ZR03QB1	ZR04QB1
CCT (K)	6500K	6500K	6500K	6500K
Beaming Angle (°)	170°	170°	170°	170°
CRI (Ra)	≥80	≥80	≥80	≥80
Luminous Flux (lm)	50	100	150	200
Voltage (V)	DC12	DC12	DC12	DC12
Power (W)	0.5	1	1.5	2
Driving Method	Constant Voltage	Constant Voltage	Constant Voltage	Constant Voltage
Dimension (mm)	27.8*15.4*10.4	52.8*15.4*10.4	77.8*15.4*10.4	47.3*40.3*10.4
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP67	IP67	IP67	IP67


Dimension

Unit: mm


ZR01QB1

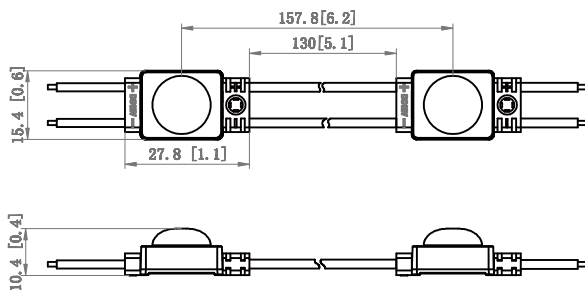

ZR02QB1

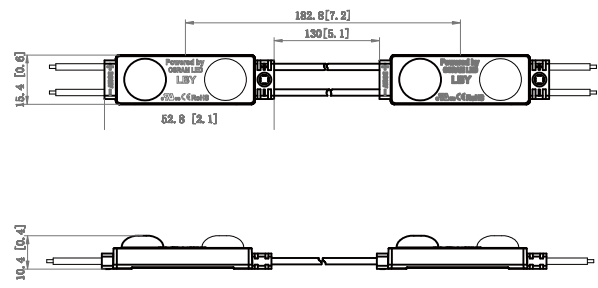

ZR03QB1

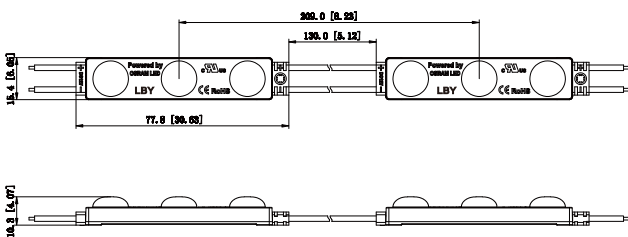

ZR04QB1

