


# DOUBLE-SIDED LED MODULES

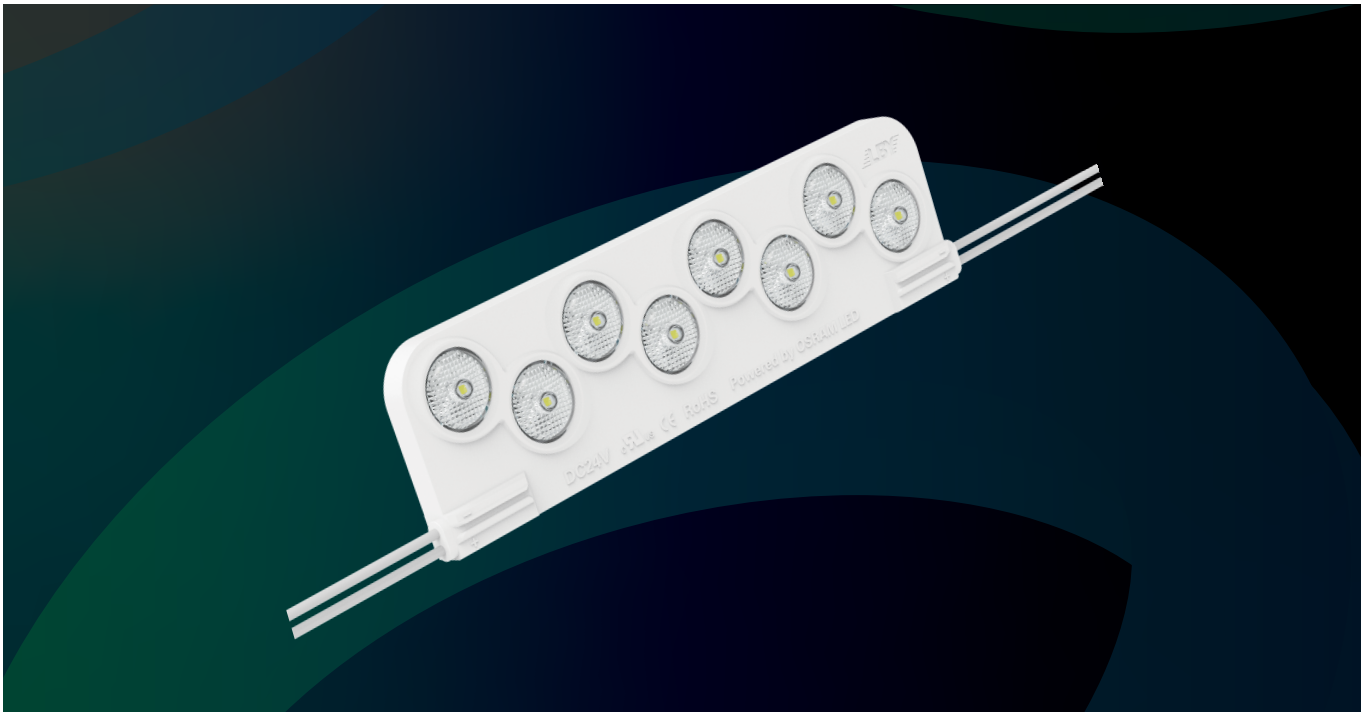

## Features

- Powered by high output OSRAM LED.
- Constant current.
- Batwing 170° optic lens.
- 20 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

## Application

- Apply to 12–30 cm depth double-sided light box at airports, metros, banks, buildings and shopping malls, etc.

## Parameters

Items	Parameters
Part Number	ZR16QD1
CCT (K)	6500
Beaming Angle (°)	170°
CRI (Ra)	≥80
Luminous Flux (lm)	525
Voltage (V)	DC24
Power (W)	5
Driving Method	Constant Current
Dimension (mm)	160*42*12.7
Working Tem. (°C)	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70
Protection Grade	IP65

## Dimension

Unit: mm

