


SIDEPOD LED MODULES

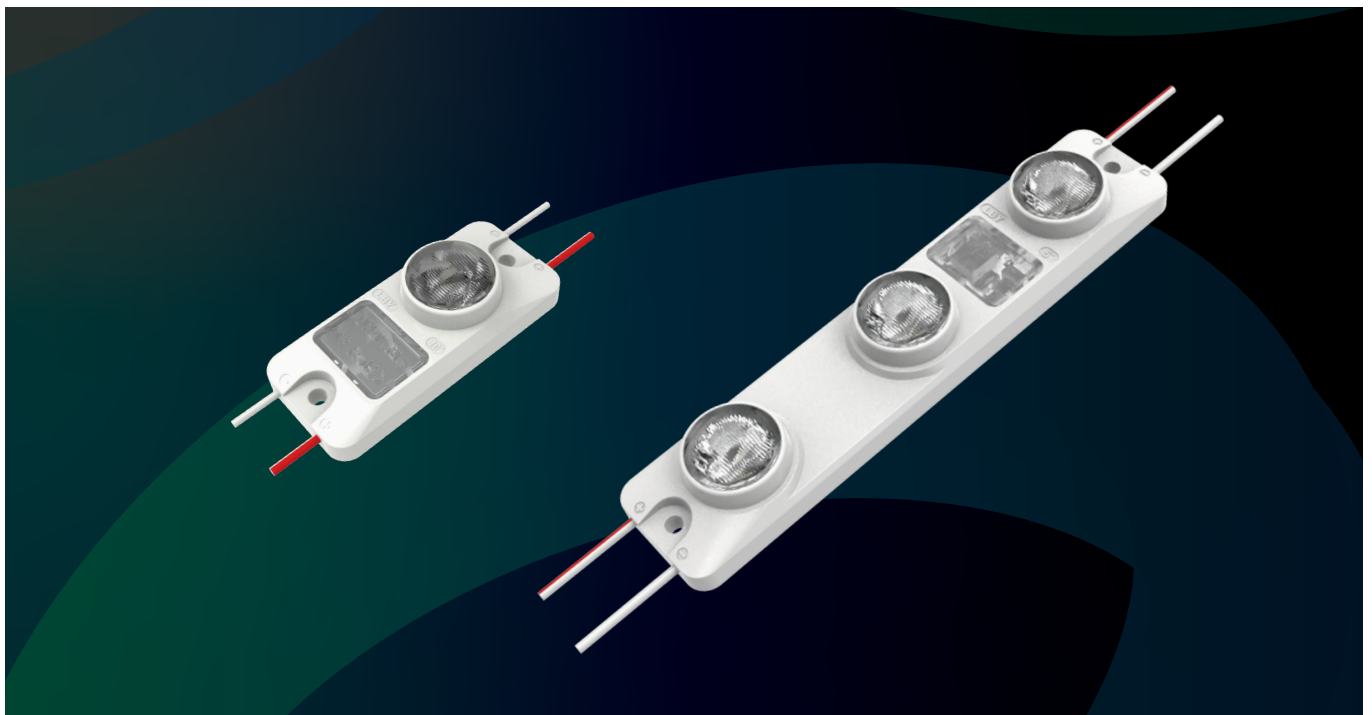

Features

- Powered by high output LG LED.
- Constant current.
- Elliptical 10x40° optic lens.
- 20/10 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

Application

- Light coverage: 0.5–3M
- Apply to 8–30 cm depth double-sided light box at airports, metros, banks, buildings and shopping malls, etc.

Parameters

Items	Parameters	
Part Number	ZX01QB3	ZX03QB3
CCT (K)	7000	7000
Beaming Angle (°)	10*40°	10*40°
CRI (Ra)	≥75	≥75
Luminous Flux (lm)	260	780
Voltage (V)	DC12/24	DC12/24
Power (W)	2.5	6.5
Driving Method	Constant Current	Constant Current
Dimension (mm)	68*30*15	142*30*15
Working Tem. (°C)	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70
Protection Grade	IP65	IP65

Dimension

Unit: mm

